




7805SM

**1/2" Square Drive Deep Sockets
with Metric Hex Profile**



PRODUCT DETAILS

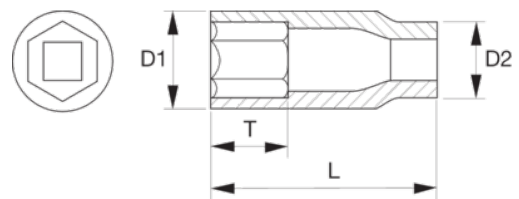

- Knurled shank for finger turning of free running fasteners
- Not suitable for machine operation or power tools
- Highly polished finish
- High-performance alloy steel
- Less wear of the fastener thanks to Dynamic-Drive™ profile
- Maximum load distribution and torque from the additional flank area
- Standards: ISO 2725-1/1174-1 and DIN 3120



Follow the Fish!



PRODUCT ATTRIBUTES

Product		L	D1	D2	T	
7805SM-10	10 mm	82.6 mm	14.9 mm	22,5 mm	7,1 mm	80 g
7805SM-11	11 mm	82.6 mm	14,9 mm	22,5 mm	7,1 mm	80 g
7805SM-12	12 mm	82.6 mm	17.9 mm	22,5 mm	8,9 mm	103 g
7805SM-13	13 mm	82.6 mm	17.9 mm	22,5 mm	9,7 mm	120 g
7805SM-14	14 mm	82.6 mm	20.4 mm	22,5 mm	10,2 mm	135 g
7805SM-15	15 mm	82.6 mm	21.6 mm	22,5 mm	10,2 mm	150 g
7805SM-16	16 mm	82.6 mm	22.9 mm	22,5 mm	11,4 mm	150 g
7805SM-17	17 mm	82.6 mm	24.1 mm	22,5 mm	12,2 mm	180 g
7805SM-18	18 mm	82.6 mm	24 mm	22,5 mm	13,5 mm	170 g
7805SM-19	19 mm	82.6 mm	26.3 mm	22,5 mm	13,5 mm	163 g
7805SM-20	20 mm	82.6 mm	26,3 mm	22,5 mm	13,5 mm	190 g
7805SM-21	21 mm	82.6 mm	28.3 mm	24,3 mm	16,5 mm	210 g
7805SM-22	22 mm	82.6 mm	29.9 mm	25,9 mm	17,8 mm	234 g
7805SM-23	23 mm	82.6 mm	28.3 mm	24,3 mm	17,8 mm	260 g
7805SM-24	24 mm	82.6 mm	32 mm	28 mm	18,3 mm	296 g
7805SM-25	25 mm	82.6 mm	32 mm	28 mm	15 mm	296 g
7805SM-26	26 mm	82.6 mm	34.7 mm	30,7 mm	18,5 mm	320 g
7805SM-27	27 mm	82.6 mm	36.2 mm	32,2 mm	19,1 mm	353 g
7805SM-28	28 mm	82.6 mm	36,2 mm	32,2 mm	19,1 mm	353 g
7805SM-29	29 mm	82.6 mm	40,9 mm	36,4 mm	19,8 mm	421 g
7805SM-30	30 mm	82.6 mm	40,9 mm	36,4 mm	20,1 mm	421 g
7805SM-32	32 mm	82.6 mm	40,9 mm	36,4 mm	24,9 mm	490 g
7805SM-34	34 mm	82.6 mm	40,6 mm	36,4 mm	24,9 mm	490 g
SB7805SM-10	10 mm	82.6 mm	14.9 mm	22,5 mm	7,1 mm	95 g
SB7805SM-11	11 mm	82.6 mm	14,9 mm		7,1 mm	80 g
SB7805SM-12	12 mm	82.6 mm	17.9 mm	22,5 mm	8,9 mm	103 g
SB7805SM-13	13 mm	82,6 mm	17.9 mm	22,5 mm	9,7 mm	109 g
SB7805SM-14	14 mm	82.6 mm	18,4 mm	22,5 mm	10,2 mm	140 g
SB7805SM-15	15 mm	82.6 mm	21.6 mm	22,5 mm	10,2 mm	160 g
SB7805SM-16	16 mm	84 mm	22.9 mm	22,5 mm	11,4 mm	150 g
SB7805SM-17	17 mm	82.6 mm	24.1 mm	22,5 mm	12,2 mm	170 g
SB7805SM-18	18 mm	82.6 mm	24,5 mm	22,5 mm	13,5 mm	170 g
SB7805SM-19	19 mm	82.6 mm	26.3 mm	22,5 mm	13,5 mm	170 g
SB7805SM-20	20 mm	82.6 mm	26,3 mm	22,5 mm	13,5 mm	190 g
SB7805SM-21	21 mm	82.6 mm	28.3 mm	24,3 mm	16,5 mm	228 g
SB7805SM-22	22 mm	82.6 mm	29.9 mm	25,9 mm	17,8 mm	234 g
SB7805SM-23	23 mm	82.6 mm	28.3 mm	24,3 mm	17,8 mm	228 g
SB7805SM-24	24 mm	82.6 mm	32 mm	28 mm	18,3 mm	296 g
SB7805SM-25	25 mm	82.6 mm	32 mm	28 mm	15 mm	296 g
SB7805SM-26	26 mm	82.6 mm	34.7 mm	30,7 mm	18,5 mm	320 g
SB7805SM-27	27 mm	82.6 mm	36.2 mm	32,2 mm	19,1 mm	353 g
SB7805SM-28	28 mm	82.6 mm	36,2 mm	32,2 mm	19,1 mm	353 g
SB7805SM-29	29 mm	82.6 mm	40,9 mm	36,4 mm	19,8 mm	421 g
SB7805SM-30	30 mm	82.6 mm	40,9 mm	36,4 mm	20,1 mm	460 g
SB7805SM-32	32 mm	82.6 mm	40,9 mm	36,4 mm	24,9 mm	421 g
SB7805SM-34	34 mm	82.6 mm	40,6 mm	36,4 mm	24,9 mm	490 g

Follow the Fish!



Contact: info@bahco.com / www.bahco.com