




7800DM

**1/2" Square Drive Sockets with
Metric Bi-Hex Profile**



PRODUCT DETAILS


- Knurled shank for finger turning of free running fasteners
- Not suitable for machine operation
- Highly polished finish
- High-performance alloy steel
- Less wear of the fastener thanks to Dynamic-Drive™ profile
- Maximum load distribution and torque from the additional flank area
- Standards: ISO 2725/1174 and DIN 3124/3120
- SB: retail packed on a plastic info card

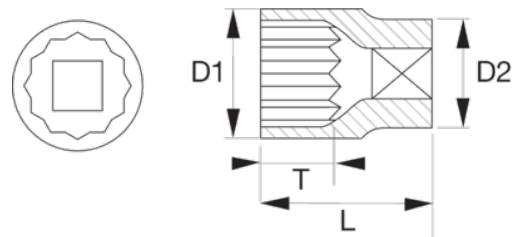

Follow the Fish!



PRODUCT ATTRIBUTES

Product	Ø	L	D1	D2	T	 g
7800DM-8	8 mm	38 mm	12.9 mm	22 mm	5,2 mm	42 g
7800DM-9	9 mm	38 mm	14.2 mm	22 mm	5,2 mm	50 g
7800DM-10	10 mm	38 mm	15.4 mm		5,8 mm	51 g
7800DM-11	11 mm	38 mm	16.6 mm	22 mm	7,1 mm	60 g
7800DM-12	12 mm	38 mm	17.9 mm	22 mm	8,9 mm	60 g
7800DM-13	13 mm	38 mm	19.1 mm	22 mm	9,7 mm	60 g
7800DM-14	14 mm	38 mm	20.4 mm	22 mm	10,2 mm	70 g
7800DM-15	15 mm	38 mm	21.6 mm	22 mm	9,1 mm	64 g
7800DM-16	16 mm	38 mm	22.9 mm	22 mm	11,4 mm	64 g
7800DM-17	17 mm	38 mm	24.1 mm	23 mm	12,2 mm	72 g
7800DM-18	18 mm	38 mm	25.4 mm	23,5 mm	13,5 mm	76 g
7800DM-19	19 mm	38 mm	26.6 mm	24 mm	13,5 mm	70 g
7800DM-20	20 mm	32 mm	27.9 mm	24,5 mm	13,5 mm	81 g
7800DM-21	21 mm	37 mm	29.1 mm	25 mm	13,5 mm	90 g
7800DM-22	22 mm	39 mm	30.4 mm	25,5 mm	13,7 mm	109 g
7800DM-23	23 mm	37 mm	31.6 mm	26 mm	14 mm	110 g
7800DM-24	24 mm	41 mm	32.9 mm	26,5 mm	15,3 mm	110 g
7800DM-25	25 mm	42 mm	34.1 mm	27 mm	15,3 mm	130 g
7800DM-26	26 mm	43 mm	35.4 mm	28 mm	15,5 mm	150 g
7800DM-27	27 mm	44 mm	36.6 mm	29 mm	17,1 mm	173 g
7800DM-28	28 mm	45 mm	37.9 mm	27,6 mm	16,8 mm	200 g
7800DM-29	29 mm	46 mm	39.1 mm	28,6 mm	17,3 mm	175 g
7800DM-30	30 mm	47 mm	40.4 mm	29,5 mm	18,5 mm	189 g
7800DM-31	31 mm	47 mm	42.9 mm	30,5 mm	19,5 mm	260 g
7800DM-32	32 mm	47 mm	42.9 mm	30,5 mm	19,3 mm	260 g
7800DM-33	33 mm	41 mm	44 mm	40 mm	20,3 mm	290 g
7800DM-34	34 mm	50 mm	46 mm	38 mm	20,3 mm	350 g
7800DM-36	36 mm	57 mm	50 mm	42 mm	20,3 mm	320 g
SB7800DM-8	8 mm	39 mm	12.9 mm	22 mm	5,2 mm	60 g
SB7800DM-9	9 mm	38 mm	14.2 mm	22 mm	5,2 mm	60 g
SB7800DM-10	10 mm	36.5 mm	14 mm		5,8 mm	60 g
SB7800DM-11	11 mm	36.5 mm	16 mm	22 mm	7,1 mm	60 g
SB7800DM-12	12 mm	38 mm	15.5 mm	22 mm	8,9 mm	60 g
SB7800DM-13	13 mm	38 mm	19.1 mm	22 mm	9,7 mm	56 g
SB7800DM-14	14 mm	34 mm	20.4 mm	22 mm	10,2 mm	70 g
SB7800DM-15	15 mm	38 mm	21.6 mm	22 mm	9,1 mm	64 g
SB7800DM-16	16 mm	37 mm	22.9 mm	22 mm	11,4 mm	70 g
SB7800DM-17	17 mm	38 mm	24.1 mm	23 mm	12,2 mm	80 g
SB7800DM-18	18 mm	38 mm	25.4 mm	23,5 mm	13,5 mm	76 g
SB7800DM-19	19 mm	38 mm	26.6 mm	24 mm	13,5 mm	80 g
SB7800DM-20	21 mm	38 mm	27.9 mm	24,5 mm	13,5 mm	70 g
SB7800DM-21	21 mm	37 mm	29.1 mm	25 mm	13,5 mm	90 g
SB7800DM-22	22 mm	37 mm	30.4 mm	25,5 mm	13,7 mm	100 g
SB7800DM-23	23 mm	40 mm	31.6 mm	26 mm	14 mm	100 g
SB7800DM-24	24 mm	41 mm	32.9 mm	26,5 mm	15,3 mm	121 g
SB7800DM-25	25 mm	42 mm	34.1 mm	27 mm	15,3 mm	124 g
SB7800DM-26	26 mm	40 mm	35.4 mm	28 mm	15,5 mm	150 g
SB7800DM-27	27 mm	42 mm	36.6 mm	29 mm	17,1 mm	173 g
SB7800DM-28	28 mm	45 mm	37.9 mm	27,6 mm	16,8 mm	190 g
SB7800DM-29	29 mm	43.5 mm	39.1 mm	28,6 mm	17,3 mm	220 g
SB7800DM-30	30 mm	47 mm	40.4 mm	29,5 mm	18,5 mm	189 g
SB7800DM-31	31 mm	47 mm	40.4 mm	29,5 mm	18,5 mm	189 g
SB7800DM-32	32 mm	47 mm	42.9 mm	30,5 mm	19,3 mm	270 g
SB7800DM-33	33 mm	46 mm	44 mm	310 mm	20,3 mm	
SB7800DM-34	34 mm	50 mm	46 mm	38 mm	20,3 mm	340 g
SB7800DM-36	36 mm	50 mm	45 mm	42 mm	20,3 mm	320 g

Follow the Fish!



Contact: info@bahco.com / www.bahco.com