




8900SM

3/4" Square Drive Sockets with Metric Hex Profile



PRODUCT DETAILS

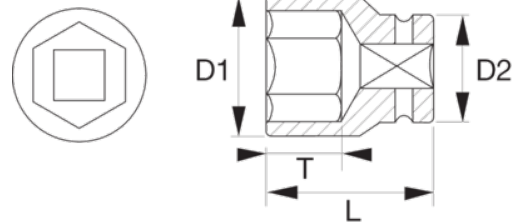

- Knurled shank for finger turning of free running fasteners
- Not suitable for machine operation
- Highly polished finish
- High-performance alloy steel
- Standards: ISO 2725/1174 and DIN 3124/3120



Follow the Fish!



PRODUCT ATTRIBUTES

Product		L	D1	D2	T	
8900SM-19	19 mm	47 mm	29.5 mm	40 mm	12 mm	130 g
8900SM-22	22 mm	47 mm	33 mm	40 mm	14 mm	140 g
8900SM-23	23 mm	50 mm	33.5 mm	40 mm	15 mm	155 g
8900SM-24	24 mm	50 mm	35.5 mm	40 mm	16 mm	175 g
8900SM-26	26 mm	53 mm	38.5 mm	40 mm		205 g
8900SM-27	27 mm	53 mm	38.5 mm	40 mm	18 mm	210 g
8900SM-28	28 mm	54 mm	40 mm	40 mm	18 mm	250 g
8900SM-29	29 mm	54 mm	42.5 mm	40 mm	20 mm	260 g
8900SM-30	30 mm	58 mm	42.5 mm	40 mm	20 mm	270 g
8900SM-32	32 mm	58 mm	45 mm	40 mm	22 mm	350 g
8900SM-33	33 mm	60 mm	46.5 mm	40 mm	22 mm	300 g
8900SM-34	34 mm	60 mm	48 mm	40 mm	22 mm	320 g
8900SM-35	35 mm	63 mm	50 mm	40 mm	22 mm	350 g
8900SM-36	36 mm	63 mm	50 mm	40 mm	24 mm	355 g
8900SM-38	38 mm	66 mm	52 mm	40 mm	27 mm	370 g
8900SM-41	41 mm	66 mm	56 mm	40 mm	28 mm	425 g
8900SM-42	42 mm	66 mm	57.5 mm	42 mm	28 mm	580 g
8900SM-46	46 mm	68 mm	62.5 mm	40 mm	34 mm	535 g
8900SM-50	50 mm	68 mm	67.5 mm	40 mm	34 mm	580 g
8900SM-55	55 mm	69 mm	74 mm	45 mm	34 mm	830 g
8900SM-60	60 mm	72 mm	80.5 mm	45 mm	37 mm	960 g

