




### A6800DM

## 1/4" Square Drive Deep Sockets with Metric Bi-Hex Profile



### PRODUCT DETAILS

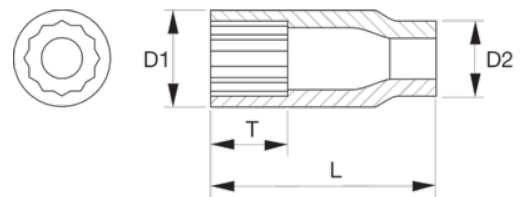

- Knurled shank for finger turning of free running fasteners
- Applicable to nuts and bolts used in the aerospace industry
- Not suitable for machine operation or power tools
- Highly polished finish
- High-performance alloy steel
- Less wear of fastener thanks to Dynamic-Drive™ profile
- Maximum load distribution and torque from the additional flank area
- Thin walled for better accessibility
- Standards: ISO 2725-1/1174-1 and DIN 3120



Follow the Fish!



PRODUCT ATTRIBUTES

Product		<b>L</b>	<b>D1</b>	<b>D2</b>	<b>T</b>	
<b>A6800DM-4</b>	4 mm	50.6 mm	6.7 mm	12,1 mm	8 mm	16 g
<b>A6800DM-5</b>	5 mm	50.6 mm	7.7 mm	12,1 mm	9,2 mm	20 g
<b>A6800DM-5.5</b>	5.5 mm	50.6 mm	8.3 mm	12,1 mm	10,5 mm	19 g
<b>A6800DM-6</b>	6 mm	50.6 mm	9.3 mm	12,1 mm	12 mm	21 g
<b>A6800DM-7</b>	7 mm	50.6 mm	10.5 mm	12,1 mm	18,3 mm	25 g
<b>A6800DM-8</b>	8 mm	50.6 mm	11.5 mm	12,1 mm	18,4 mm	26 g
<b>A6800DM-9</b>	9 mm	50.6 mm	12.7 mm	12,1 mm	18,9 mm	30 g
<b>A6800DM-10</b>	10 mm	50.6 mm	14 mm		22,4 mm	33 g
<b>A6800DM-11</b>	11 mm	50.6 mm	15.4 mm	13,1 mm	22,4 mm	41 g
<b>A6800DM-12</b>	12 mm	50.6 mm	16.5 mm	14 mm	20,8 mm	33 g
<b>A6800DM-13</b>	13 mm	50.6 mm	17.6 mm	15 mm	21,9 mm	53 g
<b>A6800DM-14</b>	14 mm	50.6 mm	18.8 mm	16 mm	24,5 mm	58 g
<b>SBA6800DM-4</b>	4 mm	50.6 mm	6.7 mm	12,1 mm	8 mm	16 g
<b>SBA6800DM-5</b>	5 mm	50.6 mm	7.7 mm	12,1 mm	9,2 mm	20 g
<b>SBA6800DM-5.5</b>	5.5 mm	50.6 mm	8.3 mm	12,1 mm	10,5 mm	19 g
<b>SBA6800DM-6</b>	6 mm	50.6 mm	9.3 mm	12,1 mm	12 mm	21 g
<b>SBA6800DM-7</b>	7 mm	50.6 mm	10.5 mm	12,1 mm	18,3 mm	25 g
<b>SBA6800DM-8</b>	8 mm	50.6 mm	11.5 mm	12,1 mm	18,4 mm	26 g
<b>SBA6800DM-9</b>	9 mm	50.6 mm	12.7 mm	12,1 mm	18,9 mm	30 g
<b>SBA6800DM-10</b>	10 mm	50.6 mm	14 mm		18,4 mm	33 g
<b>SBA6800DM-11</b>	11 mm	50.6 mm	15.4 mm	13,1 mm	22,4 mm	41 g
<b>SBA6800DM-12</b>	12 mm	50.6 mm	16.5 mm	14 mm	20,8 mm	33 g
<b>SBA6800DM-13</b>	13 mm	50.6 mm	17.6 mm	15 mm	21,9 mm	53 g
<b>SBA6800DM-14</b>	14 mm	50.6 mm	18.8 mm	16 mm	24,5 mm	58 g

