




8501-P/T

**Circular Saw blades for Portable-
/Table Saws in Wood**



PRODUCT DETAILS

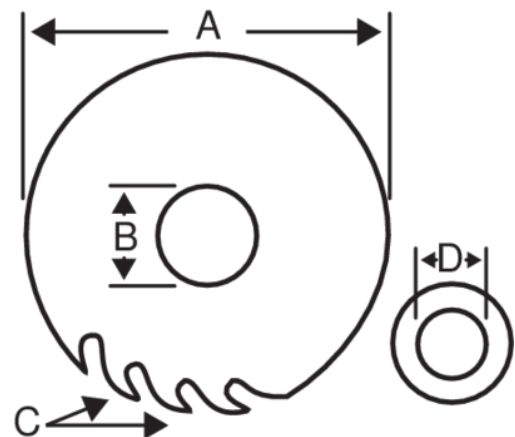


- Tungsten carbide tipped circular saw blades for Portable-/Table saw machines in wood applications
- Positive hook angle
- Blades are made of hardened cold rolled steel
- Expansion slots to take up the expansion of the steel when in use
- Reducing rings (measurement D) are available for some blades to increase the inner diameter if needed
- Packed in retail package



Follow the Fish!



PRODUCT ATTRIBUTES

Product	A	B	C	D			
8501-2	125 mm	20 mm	16	16, 13, 12.7 mm	17 °	2.6 mm	120 g
8501-3	130 mm	20 mm	16	16, 13 mm	18 °	2.6 mm	130 g
8501-4	140 mm	20 mm	16	16, 13 mm	18 °	2.6 mm	155 g
8501-4F	140 mm	20 mm	24	16, 13 mm	19 °	2.6 mm	165 g
8501-4XF	140 mm	20 mm	30	16, 13 mm	19 °	2.6 mm	235 g
8501-5	150 mm	20 mm	18	16, 13, 12.7 mm	17 °	2.6 mm	180 g
8501-5F	150 mm	20 mm	30	16, 13, 12.7 mm	18 °	2.6 mm	190 g
8501-7	160 mm	20 mm	18	16 mm	18 °	2.6 mm	200 g
8501-7F	160 mm	20 mm	30	16 mm	17 °	2.6 mm	210 g
8501-10	170 mm	30 mm	18	20, 16 mm	19 °	2.6 mm	215 g
8501-10F	170 mm	30 mm	30	20, 16 mm	18 °	2.6 mm	250 g
8501-12	180 mm	30 mm	20	20, 16 mm	18 °	2.6 mm	250 g
8501-12F	180 mm	30 mm	40	20, 16 mm	16 °	2.6 mm	370 g
8501-13	184 mm	30 mm	24	28.6, 20 mm	18 °	2.6 mm	275 g
8501-13F	184 mm	30 mm	40	28.6, 20 mm	17 °	2.6 mm	285 g
8501-184-16-24	184 mm	16 mm	24		18 °	2.6 mm	366 g
8501-184-16-40	184 mm	16 mm	40		17 °	2.6 mm	366 g
8501-15	190 mm	30 mm	20	20 mm	19 °	2.6 mm	290 g
8501-15F	190 mm	30 mm	40	20 mm	14 °	2.6 mm	310 g
8501-190-30-60XF	190 mm	30 mm	60	20 mm	16 °	2.6 mm	428 g
8501-16	200 mm	30 mm	20	25 20 18 16 mm	21 °	2.6 mm	320 g
8501-16F	200 mm	30 mm	40	25 20 18 16 mm	16 °	2.6 mm	335 g
8501-17	210 mm	30 mm	20	25 20 16 mm	22 °	2.6 mm	350 g
8501-17F	210 mm	30 mm	40	25 20 16 mm	18 °	2.6 mm	385 g
8501-210-30-60XF	210 mm	30 mm	60	25/20/16 mm	18 °	2.6 mm	562 g
8501-22	230 mm	30 mm	20	25 16 mm	17 °	2.8 mm	500 g
8501-22F	230 mm	30 mm	40	25 16 mm	17 °	2.8 mm	530 g
8501-230-30-60XF	230 mm	30 mm	60	25/16 mm	17 °	2.8 mm	712 g
8501-23	235 mm	30 mm	30	25 16 mm	16 °	2.8 mm	560 g
8501-23F	235 mm	30 mm	40	25 16 mm	14 °	2.8 mm	560 g
8501-235-30-60XF	235 mm	30 mm	60	25/16 mm	14 °	2.8 mm	701 g
8501-28	250 mm	30 mm	24	25 20 16 mm	23 °	2.8 mm	650 g
8501-28F	250 mm	30 mm	40	25 20 16 mm	16 °	2.8 mm	650 g
8501-28XF	250 mm	30 mm	60	25 20 16 mm	19 °	2.8 mm	795 g

Follow the Fish!

