



LWV, Flap rolls of abrasive fleece for conditioning machines

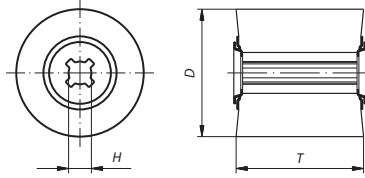

Ordering example: A22861001000104

A = reg. Aluminium Oxide

Machines to suit: page 275.




PG 10

Product number	Description	Grit	D mm	T mm	H mm	n recom. (1/min)	n max. (1/min)	recommended for Information on page 438		
A2286100500104	LWV 100050	A 104	100	50	19	2.800	6.000	① ② ③ ④ ⑤ ⑥ ⑦ ⑧	■	2
A2286100500106	LWV 100050	A 106	100	50	19	2.800	6.000	① ② ③ ④ ⑤ ⑥ ⑦ ⑧	■	2
A2286100500107	LWV 100050	A 107	100	50	19	2.800	6.000	① ② ③ ④ ⑤ ⑥ ⑦ ⑧	■	2
A22861001000104	LWV 100100	A 104	100	100	19	2.800	6.000	① ② ③ ④ ⑤ ⑥ ⑦ ⑧	■	1
A22861001000106	LWV 100100	A 106	100	100	19	2.800	6.000	① ② ③ ④ ⑤ ⑥ ⑦ ⑧	■	1
A22861001000107	LWV 100100	A 107	100	100	19	2.800	6.000	① ② ③ ④ ⑤ ⑥ ⑦ ⑧	■	1

Grinding, Polishing
(flexible)


LWV, Flap rolls of abrasive fleece with thread



Ordering example: A2286100501104

A = reg. Aluminium Oxide

Suitable for controlled angle grinders.



PG 10

Product number	Description	Grit	D mm	T mm	Thread	n recom. (1/min)	n max. (1/min)	recommended for Information on page 438		
A2286100501104	LWV 100050	A 104	100	50	M 14	2.800	6.000	① ② ③ ④ ⑤ ⑥ ⑦ ⑧	■	2
A2286100501106	LWV 100050	A 106	100	50	M 14	2.800	6.000	① ② ③ ④ ⑤ ⑥ ⑦ ⑧	■	2
A2286100501107	LWV 100050	A 107	100	50	M 14	2.800	6.000	① ② ③ ④ ⑤ ⑥ ⑦ ⑧	■	2