



Compack series shrink-wrap machines:

"i" Series intelligent sealing system




Models	Available Series*	Chamber Sizes	Max. Film Width	Machine weight		Power supply	Consumption Max/ average	Machine dimensions a x b x c x d e (mm/inches)	Packed dimensions (mm/inches)	Max. Capacity
				Net	Crated					
COMPACT 4500-i Code : Y12 001 1022	MG	450x320x250mm 17"x13"x9"	400mm 15"	80 kg 176 lbs	112 kg 246 lbs	230V, 15 Amps 1 Phase	3,4/2,1 kW	1085x615x1135x865x270 43"x24"x44"x34"x10"	1200x800x800 47"x31"x29"	8-10 packs/min %20 faster in MC model
COMPACT 5800-i Code : Y12 001 1042	MG-MC	580x440x250mm 22"x17"x9"	530mm 21"	109 kg 240 lbs	144 kg 317 lbs	230V, 19 Amps 1 Phase	4,4/2,6 kW	1227x745x1135x865x270 48"x29"x45"x34"x11"	1200x800x800 47"x31"x29"	
COMPACT 7000-i Code : Y12 001 1062	MG	700x540x250mm 27"x21"x9"	650mm 25"	146 kg 321 lbs	196 kg 432 lbs	400V, 22 Amps 3 Phase	4,9/2,9 kW	1499x859x1133x885x270 59"x34"x45"x34"x11"	1740x1040x800 68"x41"x31"	
COMPACT 8000-i Code : Y12 001 1086	MG	810x640x250mm 31"x25"x9"	750mm 29"	158 kg 348 lbs	209 kg 460 lbs	400V, 27 Amps 3 Phase	6,2/3,7 kW	1800x980x1135x880x270 79"x38"x45"x34"x11"	1800x1040x900 71"x41"x35"	

* ST: Standard series without magnetic hold down, *MG: Magnetic hold down series, *MC: Automatic discharge series

* Color : RAL 7035 Light gray

Warranty: One year on non-wearable parts

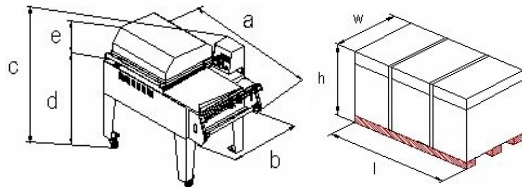

Features:

- One Step Shrink System. Shrinks and seals simultaneously, only one operator required.
- Packaging solutions for small or medium volume of production.
- Digital panel in English and in other languages.
- Shrink temperature fine tuning in digital setting option.
- Solid state relays for longer life of electrical components
- Height adjustments for different heights of the products and adjustable production loading tray.
- Practical film roll placement and easy to slide film housing device.
- Ceramic blade housing, film perforator for optimal product appearance, standard legs, with casters for easy mobility.
- Magnetic holder (MG) for hood with timer control.
- ISO 9001 quality standard with the relevant norm's confirmations.
- CE marking, guarantee for spare part stock and after sales support and one year warranty on non-wearable parts

What is "intelligent sealing" system? (Maripak patented system).

Blade temperature is normally varied and very often over heated due to the shorter or longer cycles with the fixed powered energy to the blade. Thus the mechanical contact points on the seal bar become weak. Due to the damages on the sealing system, sealing and packaging quality drops dramatically.

- **Target temperature can be fixed.** Depending on cycle time lengths, necessary power calculation is made automatically,
- Blade temperature can be fixed even **in the first start-up cycle.**
- With intelligent sealing system; the sealing power is fixed **even if the cycle periods are varied**
- Always the blade is powered as much as needed, potential **operator mistakes** will be avoided,
- Many times **longer life time** for rubber pad, teflon and ceramic,
- **Smoke-free operation** with blade temperature consistency, for operator health and environment.
- Improves **packaging quality** with better sealing and shrink performance
- Cosmetic quality of the sealing line will be perfect without burned black **blade residues.**