

HY




HY EASY LINE

The HY Easy Line Manual Scissor Lift combines the functions of a manual pallet truck, a lift table, and a workbench in one solution, maximizing utility in various work environments.



ERGONOMICS

Lift heights up to 800 mm, tailored to accommodate a wide range of tasks while promoting an ergonomically correct posture and reducing physical strain on the operator, ensuring greater comfort and efficiency.

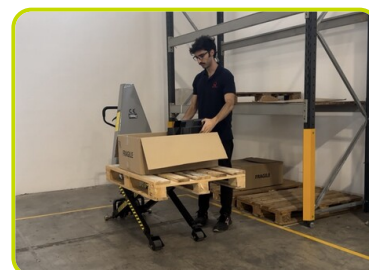

SAFETY AND EASE OF USE

FRONT AND REAR STABILIZERS:

Enhance stability and safety during operation. The rear stabilizers activate automatically when the working height exceeds 400 mm, ensuring a secure and stable platform.

PROPORTIONAL LOWERING VALVE:

Lowering speed can be proportionally controlled thanks to the handle lever on the tiller. A perfect tool to carry fragile and delicate loads.



Description

1.3 Drive			Manual
1.4 Operator type			Pedestrian
1.5 Load capacity	Q	kg	1000
1.6 Load centre distance	c	mm	600
1.8 Load axle to end forks	x	mm	936
1.9 Wheel base	y	mm	1292

Weights

2.1 Service weight		kg	113
2.2 Axle load, laden rear		kg	718
2.2 Axle load, laden front		kg	395
2.3 Axle load, unladen front		kg	77
2.3 Axle load, unladen rear		kg	36

Tyres/Chassis

3.1 Tyres: front wheels			POLY
3.1 Tyres: rear wheels			POLY
3.2 Tyre size: Steering wheels - Width		mm	50
3.2 Tyre size: Steering wheels - Diameter		mm	180
3.3 Tyre size: Load rollers - Diameter		mm	80
3.3 Tyre size: Load rollers - Width		mm	70
3.5 Tyre size: rear wheels - Q.ty (X=driven)		nr	2
3.6 Tread, front	b10	mm	150
3.7 Tread, rear	b11	mm	418

Dimensions

4.4 Lift height	h3	mm	715
4.9 Height of tiller in drive position max	h14	mm	1230
4.9 Height of tiller in drive position min	h14	mm	560
4.15 Height, lowered	h13	mm	85
4.19 Overall length	l1	mm	1650
4.20 Length to face of forks	l2	mm	360
4.21 Overall width (front/rear)	b1/b2	mm	540
4.22 Fork dimensions - Thickness	s	mm	50
4.22 Fork dimensions - Width	e	mm	160
4.22 Fork dimensions - Length	l	mm	1150
4.32 Ground clearance, centre of wheelbase	m2	mm	21
4.34 Aisle width	Ast	mm	2090
4.35 Turning radius	Wa	mm	1440

Performance data

5.2 Lifting speed laden	strokes	74
5.2 Lifting speed unladen	strokes	26

The information is aligned with the Data file at the time of download.
Printed on 09/09/2025 (ID 190951)

©2025 | PR Industrial S.r.l. – Loc. Il Piano – 53031 Casole d'Elsa (SI) – ITALY. Company subject to the management and coordination of Generac Power Systems Inc. | All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice